

CL 1010 Time



Index

Introductory information	2
1. General	2
2. Security guidelines	2
Installation of the system	4
3. Scope of supply	4
4. Positioning and mounting	5
5. Establishing the power supply	9
6. Installation instructions for the fuses	9
Operating guidelines	10
7. Functions of the CL 1010 Time	10
Further Information	13
8. Service	13

1. General

Dear customer,

Congratulation on purchasing a BURY product. You have chosen a high quality product that is extremely easy to use. All aspects of BURY production through to sales and service are subject to strict quality management according to DIN EN ISO 9001. All BURY products meet CE and e1 security standards. Furthermore, we provide a two-year warranty on all components.

Please read the operating manual carefully so that you can fully enjoy your BURY product. If you have any further questions concerning installation or operation of your car kit, please contact your dealer. He will be happy to give you reliable advice. You can also contact our hotline. Our phone and fax numbers are listed in the chapter Service at the end of the operating instructions.

Have a good trip!

2. Security guidelines



Installation – who and where

The installation of this system can be carried out by yourself but please observe the installation requirements of the automotive manufacturer (VAS 1978). During the installation, park the car at a place where the road traffic is not impaired. We recommend to let a specialised workshop perform the installation.



Power supply

The system is designed for use in both passenger vehicles and heavy goods vehicles (HGVs). The operating voltage spans the 10 to 30 volts range.

Position, volume

Install the components of the device in the vehicle so that your field of vision is not impaired and the components are not mounted in the impact zone of the passenger compartment or in the airbag inflation zones. The removal of coverings (with and without airbags) or components of the dashboard requires – in some cases – special tools and special knowledge.

**Intended use**

We shall not be liable for damages or malfunctions due to improper use of the device. Therefore, do not expose the device to moisture, extreme temperatures or shocks and carefully follow the procedure described in the installation and operating guidelines.


**Use while driving**

Operate the system only when the situation allows it and when you do not endanger, harm, constrain, or annoy other road users. The volume of the device has to be set in a way that exterior noise is still audible.

Faults

Do not commission the device if you detect or assume a defect. In this case, contact a BURY specialised dealer or our hotline. Improper repair efforts can be dangerous for you. Therefore, only skilled personnel may perform inspections.

3. Scope of supply

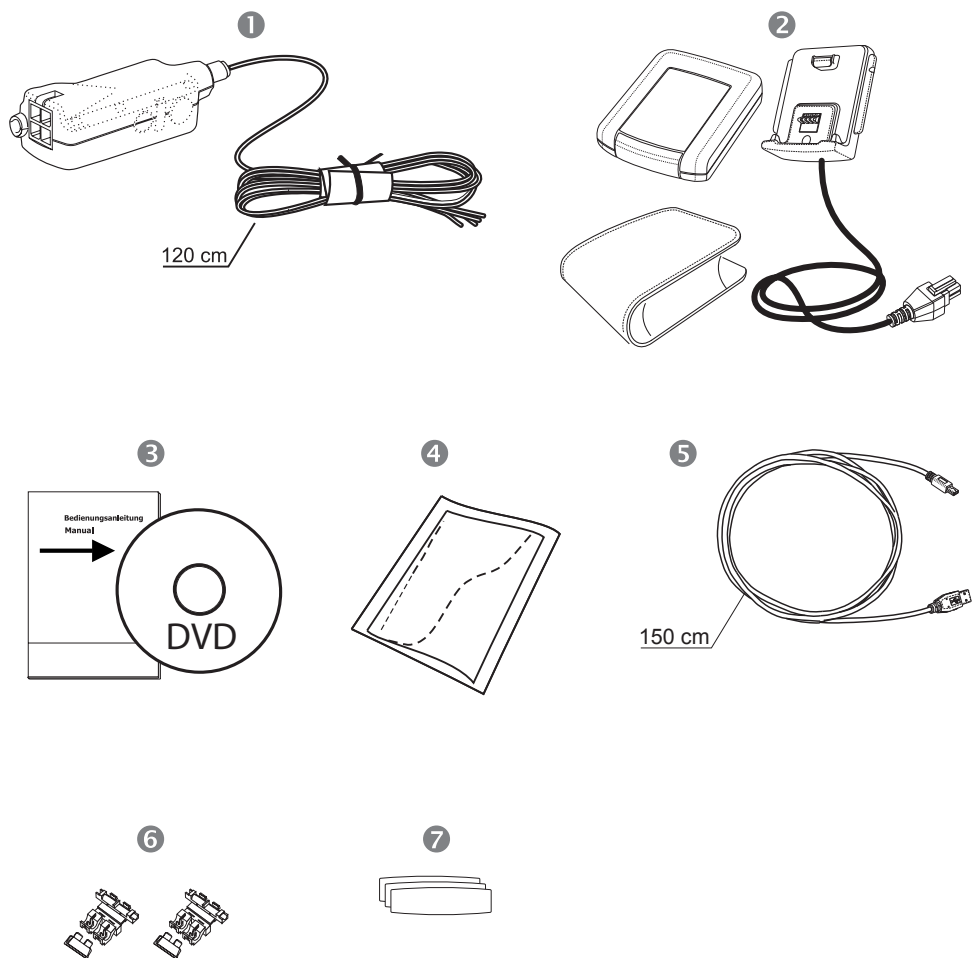

Description of the components:

- 1) Connector box with power supply cable
- 2) CL 1010 Time, case and holder
- 3) Installation and Operating manual, software on DVD
- 4) Cleaning cloth
- 5) USB data cable
- 6) Fuses
- 7) Label

Please note:

► If certain components are added or omitted you will receive the corresponding information on a separate enclosure.

4. Positioning and mounting




Step 1:

First of all, please choose the most convenient position for the monitor and the holder in your vehicle by attaching the CL 1010 Time to the pad and checking different positions in the vehicle.

The CL 1010 Time should be installed so that the holder, together with the cable, is positioned away from you, because the system has a push-button on its top section. With this button you are able to switch between private and business journeys. An alternative mounting is possible but it makes operation more difficult.

If you would like to use the device during your journey, positioning it in the front area on the driver's side is advisable. Sit in the vehicle and check whether you can reach the device without difficulty. If this is not possible then you should refrain from using the device during your journey and ensure you make the required settings prior to starting each journey that you make.

Also make sure that the CL 1010 Time is able to receive GPS data optimally. The holder should therefore be attached to the dashboard in a way which is as level as possible. In certain vehicles the GPS reception may be hampered because of windows with evaporated metal surfaces. In some vehicles, the installation in the glove box won't provide an optimum result either. Ask your garage about this or contact us via our hotline if you have further questions.



After having found a suitable position in the vehicle you can mount / attach the holder accordingly. Please use a cleaning cloth for degreasing the surfaces you want to attach the holder to.



The end of the cable with the small Molex plug is ideally suited for placing through small openings in the dashboard area. This facilitates a practically invisible installation of the cable. Take the length of the cable into account and make sure that it is of sufficient length to reach the intended location of the connector box.






Important:

- ▶ When positioning the monitor please take care that the CL 1010 Time does not impair the view onto the road, that it will not be installed in the impact zone of the passenger compartment (amongst others in the airbag inflation zones) and that cables may be laid without any problems.
- ▶ The holder can be affixed just once, removing could damage the adhesive area. In case of high variations in temperatures - depending on the structure and the features - decolourisations of the surfaces can occur during the subsequent utilization.

To release the CL 1010 Time from the holder, please press in the two clips on each of the sides. The attachment is then released and you can remove the CL 1010 Time.

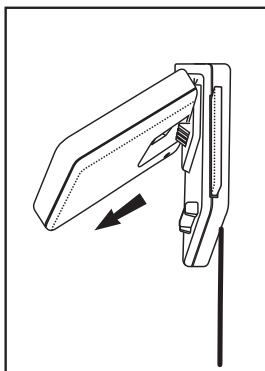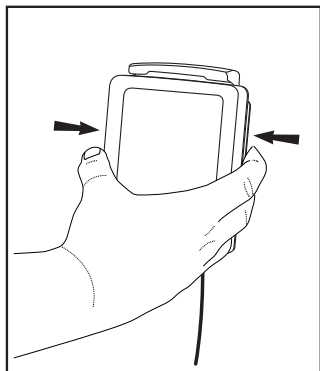

Example of installation:

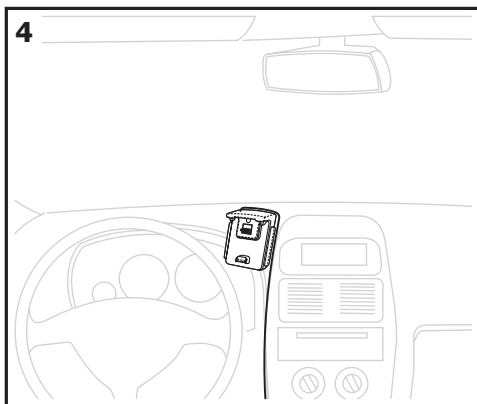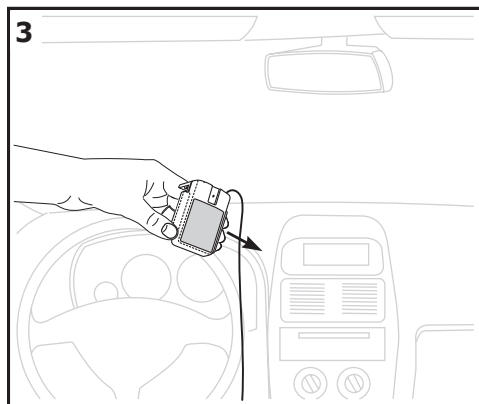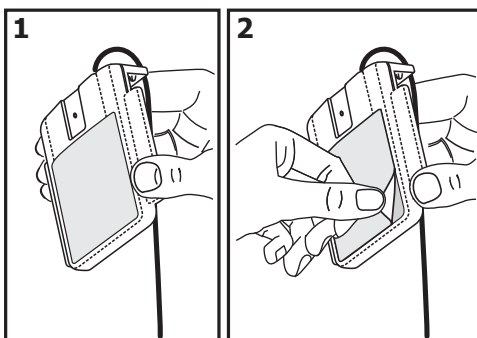


Step 2:

Please lay the cables in a way that they do not lie/hang unsecured in the vehicle and that they may not influence the conducting of the vehicle. When laying a cable, please take care that it is not under traction stress but that it has some tolerance. Avoid crushing the cable as damages of the insulation can be caused by friction/rubbing.

Step 3:


Install the connector box at a convenient place in the vehicle. This can e.g. be behind the radio, in the glove box, or in the centre console. Please mind that you can access the connections of the box without difficulty. Before connecting the components to the electronics box you should branch off the battery for safety reasons. In doing so, take into account that there might be a radio coding (confer radio manual).

**Important:**

► Please install the connector box behind a cover or somewhere you can only reach by opening or unfastening a protective cover / a cover. The terminal box must not hang loosely in the vehicle.

Step 4:

After this, connect the Molex plug with the connection box.

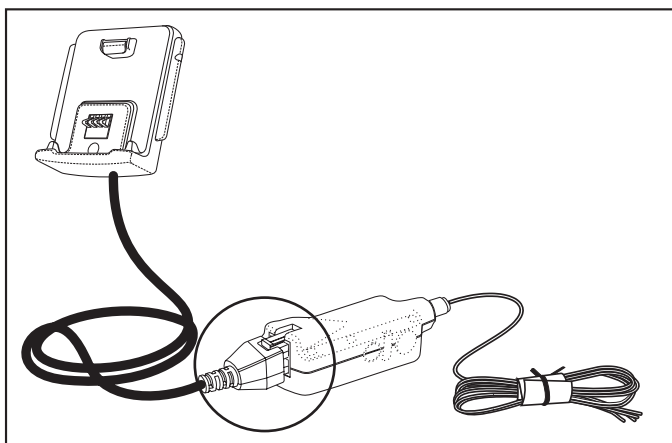

5. Establishing the power supply



The power supply of the system is established via a 3-core cable. Connect the black (clamp 31 – minus), the red (clamp 30 – steady plus) and the blue cable (clamp 15 – ignition plus) to the power supply of your radio (where required via the cigarette lighter or the fuse box).

Attention:

► The blue cable must not be connected to clamp 30, otherwise it is not possible to start or finish a journey (ignition signal requirement). Also, if the vehicle is not running for a long period, it could cause the car battery to run out.

6. Installation instructions for the fuses

Please cut through the red, the black and the blue cable by means of a wire cutter or scissors. Now insert the two endings of the red cable resulting from the cut into one of the binders, then close it. If you hear two clicking noises, the clamp snapped in properly. Now insert one of the fuses and then repeat the procedure with the other cables.

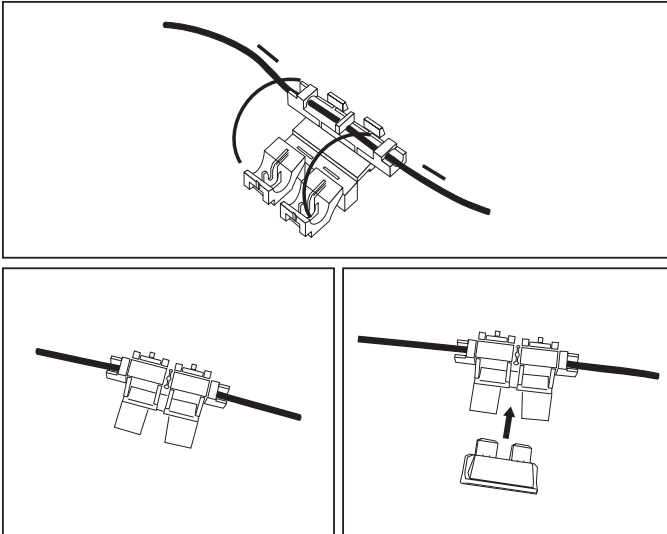

7. Functions of the CL 1010 Time

The CL 1010 Time is a system which serves the purpose of displaying the vehicle positions with the use of GPS coordinates. Using road map data, these coordinates can then display a specific route along which the vehicle has travelled. This serves the purpose of setting an electronic log book which you can then subsequently edit or supplement with a special PC software programme. You can find this software on the DVD.

Important:

► Many German tax offices recognise this electronic log book as being proof of professional mobility. If problems with such recognition should occur within the scope of either German or international laws however, the company BURY GmbH & Co. KG is not able to accept an obligation for the provision, rectification or adaptation of the software that is provided, or other software, in as far as you, as the user, present its data for settlement / as proof of your professional activity at a tax office.

► We are, however, prepared to assist you with any problems you experience with the tax authorities in this context. Please contact us.

You can choose from three different types of journey for the log:

Private Journey:

Basically, purely private journeys without any occupational aspect.

Business Journey:

Basically, purely occupational journeys without any private aspect.

Commute to work:

Simple journey to the workplace. The journey back can run as a private journey, because this e.g. is not taken into account by German legislation.

If the power supply has been connected correctly then the CL 1010 Time activates after you have switched on the ignition. The system will then attempt to receive GPS data as quickly as possible. Depending on the tour mode, either the green or the red LED or both will flash. The LEDs display the tour mode which is currently activated (commute to work, business or private journey). After sufficient satellites have been found to determine the position, one longer acknowledgement tone is emitted with a commute to work or business journey, and two long acknowledgement tones with a private journey.

You can change the mode by briefly pressing down on the button on the top of the main unit. If the red LED then lights up, the private journey mode is activated. If the business journey is set, however, the green LED lights up. During a commute to work, both of the LEDs light up. The LEDs remain permanently illuminated unless you have selected an alternative setting in this context using the PC software. If this is the case then the LEDs will fade out after approx. 10 seconds.

The internal memory capacity of the system is sufficient to save approx. 1 million separate sets of position data. The saving of this information occurs on a dynamic basis and is based on, for e.g., the speed travelled by, or the stationary nature of the vehicle. The advantage of this is that you don't have to complete a read-out of the data of the system on a daily or weekly basis. The storage capacity in this context is sufficient for approx. 10,000 kilometres driven or for a minimum of 3 months. The following data is saved:

- Date and time
- Vehicle position
- Speed
- Height above sea level
- The number of satellites located.

Advice:

► Depending on the number of your appointments and contacts visited, it can be advisable to sort and maintain the data using the management software every week at the latest.

The CL 1010 Time, which is fitted with a push switch and two LEDs only saves the tour data of the vehicle if a commute to work or business journey has been activated. With private journeys, only the start date and end date of the journey and the route completed are recorded.

In order to carry out a read-out of the data, you must first remove the CL 1010 Time from the cradle. Note down the vehicle's current mileage / number of kilometres.

Install the BURY Time Suite on a PC or laptop. Depending on the hardware configuration, the installation of the software can take 10 – 15 minutes. Follow the instructions during installation. Technical requirements for the administrative programme:

- Processor: Intel Pentium (or equivalent) with 1.5 GHz
- Operating system: Windows XP with Service Pack 2 or higher
- .NET 3.5 Service Pack 1 (supplied on DVD)
- Datenbank: Firebird SQL 2.1 (supplied on DVD)
- Working memory: at least 512 MB
- Hard disk drive: at least 3 GB
- Screen resolution: at least 1024x768 pixels
- USB interface

Now connect the CL 1010 Time with your PC using the USB cable. You will find a USB jack on the side of the main unit of the CL 1010 Time.

A detailed installation guide and a description of the BURY Time Suite are also provided on the DVD. Using the software, you are able to complete your tour data, change the system setting, enter a driver ID or activate the system's integrated warning function prior to danger zones.

Please note:

►The danger zones that are included are provided by the third party company Eifrig Media. You can download updates to this data against payment at the internet site www.scdb.info.

►A warning sound is emitted every time you approach a danger zone.



Important:

►Please ensure you pay attention to and comply with the road traffic laws and regulations which are in force in the countries in which you want to use this software! You don't have to worry, however, if you use the system in the condition as it is supplied, as this function is not yet activated.

If the CL 1010 Time is attached to a PC, the green LED flashes briefly. During this time, the identification data are read out and the CL 1010 Time is initialized on the PC. After this process, the green LED illuminates constantly. If you import the position data into the BURY Time Suite or reset the CL 1010 Time to its factory settings, the green LED flashes again. During these situations, please do not interrupt the connection between the PC and the CL 1010 Time.

If you activated the danger zones warning function, then you are also able to set the volume level adjuster of the integrated Piezo (acoustic sound emitter). If you press down and hold the push button for approx. three seconds, then the signal gets louder on a second-by-second basis. Once the maximum volume is reached, the reproduction automatically starts at the lowest setting once again.

8. Service

In case of general or technical queries, suggestions and comments, please do not hesitate to contact our team at any time. Suggestions and feedback are always welcomed:

BURY GmbH & Co. KG
Robert-Koch-Straße 1-7
32584 Löhne

Hotline: +49(0)180 5 - 842 468*

Faxline: +49(0)180 5 - 842 329*

* 0.14 €/min. Deutsche Telekom AG landline

The costs of international telephone calls which are made from abroad can vary.

E-Mail: hotline@bury.com

Service desk:

In case of complaints, please return the product directly to our service desk:

BURY GmbH & Co. KG
Im Hause DPD Depot 103
Robinienweg
D-03222 Lübbenau

Information on the disposal of electrical goods in the EU

The crossed out wheellie bin symbol means that electrical and electronic products, batteries and accumulators must be disposed of separately in the European Union. Please do not dispose of any such products in your normal household waste. As the owner of a product of this sort you are legally obliged to dispose of it at your local dumping site or recycling centre, where you are able to leave your waste electrical goods free of charge.

